




R&S®RTB2000


versus Keysight InfiniiVision 2000 X-Series



The R&S®RTB2000 outperforms the Keysight InfiniiVision 2000 X-Series in major parameters with the power of 10

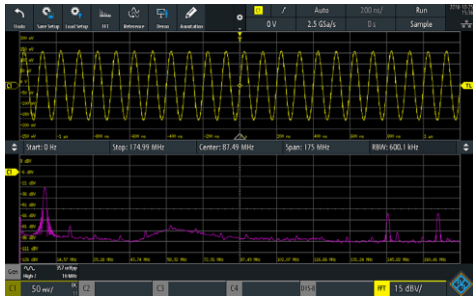

R&S®RTB2000: 10.1" display, 1280 × 800 pixel resolution

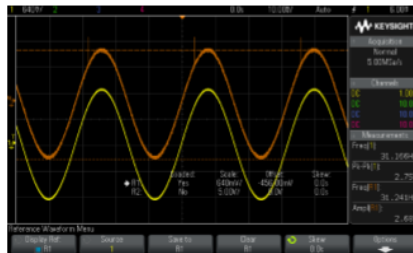

Keysight DSO/MSOX2000A: 8.5" display, 800 × 480 pixel resolution

Your benefit	Features
10-bit ADC: four times more vertical resolution	The proprietary Rohde & Schwarz 10-bit ADC used in the R&S®RTB2000 allow four times more vertical resolution compared to the standard 8-bit ADC in the Keysight 2000 X-Series. Finer voltage measurements become important as the voltage levels decrease.
10 Msample memory: capture longer periods	The responsive 10 Msample memory per channel with quick zoom functions allow 100 times more acquisition time than the Keysight 2000 X-Series at the same sample rate
10.1" high-resolution capacitive touchscreen with gesture support	The capacitive touchscreen of the R&S®RTB2000 offers about three times more resolution than the display of the Keysight 2000 X-Series. Gesture support enables fast setting times and short learning time.

Parameter	R&S®RTB2000	Keysight 2000 X-Series
Acquisition system		
Channels	4/2 for all models	4/2 for all models
Bandwidth	70/100/200/300 MHz (upgradeable)	70/100/200 MHz (upgradeable)
ADC resolution	10-bit	8-bit
Max. resolution	16-bit with high resolution	12-bit with averaging
Max. realtime sampling rate	2.5 Gsample/s	2 Gsample/s
Standard memory depth	10 Msample per channel (all channels) 20 Msample (interleaved)	0.1 Msample per channel (all channels) 1 Msample optional
Segmented memory depth/history mode	Optional – 160 Msample	–
Waveform update rate	50 000 waveforms/s standard 300 000 waveforms/s in fast segmented memory mode	200 000 waveforms/s standard
MSO sampling rate / memory	1.25 Gsample/s, 16 digital channels / 10 Msample, upgradeable	1 Gsample/s, 8 digital channels / 12.5 ksample, 125 ksample optional
Hardware input sensitivity	1 mV	4 mV
X-in-1 oscilloscope		
Serial decode options	I ² C, SPI, UART/RS-232/422/485, CAN, LIN (analog and digital channels)	I ² C, SPI, UART/RS-232/422/485, CAN, LIN (on analog channel only)
Generator option	function and arbitrary, 4-bit pattern	function only
Frequency response analysis (Bode plot)	yes	–
Multifunction	DVM, counter	DVM, counter
Form factor		
Display	10.1" (1280 × 800) pixel resolution	8.5" (800 × 480) pixel resolution
Touchscreen	yes – capacitive	–
Grid annotation	yes	–
Boot time	~ 10 s	~ 50 s
Dimensions	390 mm × 220 mm × 152 mm	370 mm × 252 mm × 148 mm
Weight	2.5 kg	3.9 kg

Innovative user interface, quick and easy to use



The R&S®RTB2000 user interface offers features not available on the Keysight 2000 X-Series.

- ▶ Touchscreen with gesture support and on-screen annotation
- ▶ Mouse support
- ▶ Grid annotations for easy determination of vertical and horizontal values
- ▶ Pull up/down menu for optimized waveform viewing
- ▶ Quick measure button to immediately display nine automated measurements on the signal



Configurable toolbar (including undo and redo) for fast access to functions and quick finger annotation, allowing fast operation and documentation

Education mode

The R&S®RTB2000 gives accurate and fast results. With its modern multifunction capabilities, including a built-in generator, it is the perfect tool for education. For classroom training, the education mode deactivates comfort functions such as autoset, quick measure and automatic measurements.

More investment protection

When it comes to investment protection, the R&S®RTB2000 is class-leading. Buy only what you need today and upgrade later as your needs grow. Upgrades after purchasing are available for:

- ▶ Bandwidth up to 300 MHz
- ▶ Digital channels (mixed signal option)
- ▶ Serial triggering and decoding of I²C, SPI, UART/RS-232/422/485, CAN/LIN
- ▶ History mode with up to 160 Msample memory
- ▶ Function, arbitrary and pattern generator

Advantages of R&S®RTB2000 over Keysight 2000 X-Series




4 x
More ADC resolution




20 x
More memory



1.49 x
More display area



1.3 x
More sample rate



4 x
Lower sensitivity



5 x
Faster boot-up

Rohde & Schwarz GmbH & Co. KG | Europe, Africa, Middle East +49 89 4129 12345 | North America 1 888 TEST RSA (1 888 837 87 72)

Latin America +1 410 910 79 88 | Asia Pacific +65 65 13 04 88 | China +86 800 810 82 28 / +86 400 650 58 96

www.rohde-schwarz.com | customersupport@rohde-schwarz.com

R&S® is a registered trademark of Rohde & Schwarz GmbH & Co. KG | PD 5214.9938.32 | Version 01.11 | April 2018 (ad)

Trade names are trademarks of the owners | R&S®RTB2000 versus Keysight InfiniiVision 2000 X-Series | Data without tolerance limits is not binding

Subject to change | © 2019 Rohde & Schwarz GmbH & Co. KG | 81671 Munich, Germany