

R&S® SPECTRUM RIDER FPH HANDHELD SPECTRUM ANALYZER

Specifications

3
year
warranty



Data Sheet
Version 10.00

ROHDE & SCHWARZ

Make ideas real



CONTENTS

Definitions	3
Specifications.....	4
Frequency	4
Sweep time	4
Bandwidths.....	5
Level	5
Trigger functions.....	7
Inputs and outputs.....	8
General data.....	8
Equivalence of specifications for different R&S®FPH part numbers.....	9
R&S®FPH-B100 type N RF input connector for model .26	9
R&S®FPH-K7 modulation analysis.....	10
R&S®FPH-K19 channel power meter.....	12
R&S®FPH-K29 pulse measurements with power sensor.....	12
R&S®FPH-K43 receiver mode and channel scan measurement.....	13
R&S®FPH-K57 advanced gated trigger measurement	13
R&S®HA-Z350 log-periodic OEM antenna	13
R&S®FSH-Z14 directional power sensor	14
R&S®FSH-Z44 directional power sensor	16
Ordering information	18
Options.....	18
Extras.....	18
Antennas and antenna accessories	19
R&S®NRP-Zxx power sensors supported by the R&S®Spectrum Rider FPH	20
Optical power sensors and accessories.....	20
Service options.....	21

Definitions


General

Product data applies under the following conditions:

- Three hours storage at ambient temperature followed by 30 minutes warm-up operation
- Specified environmental conditions met
- Recommended calibration interval adhered to
- All internal automatic adjustments performed, if applicable

Specifications with limits

Represent warranted product performance by means of a range of values for the specified parameter. These specifications are marked with limiting symbols such as $<$, \leq , $>$, \geq , \pm , or descriptions such as maximum, limit of, minimum. Compliance is ensured by testing or is derived from the design. Test limits are narrowed by guard bands to take into account measurement uncertainties, drift and aging, if applicable.

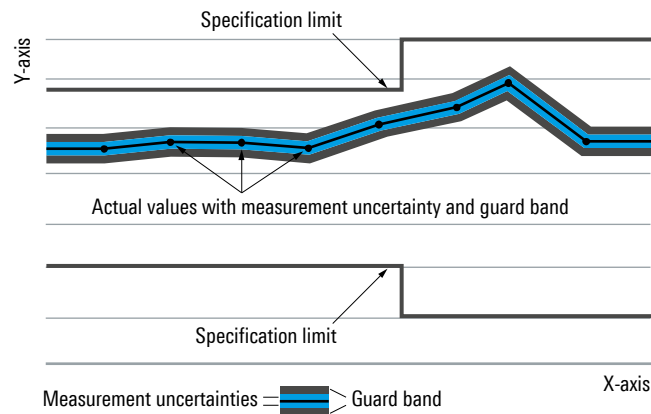

Non-traceable specifications with limits (n. trc.)

Represent product performance that is specified and tested as described under “Specifications with limits” above. However, product performance in this case cannot be warranted due to the lack of measuring equipment traceable to national metrology standards. In this case, measurements are referenced to standards used in the Rohde & Schwarz laboratories.

Specifications without limits

Represent warranted product performance for the specified parameter. These specifications are not specially marked and represent values with no or negligible deviations from the given value (e.g. dimensions or resolution of a setting parameter). Compliance is ensured by design.

Typical data (typ.)

Characterizes product performance by means of representative information for the given parameter. When marked with $<$, $>$ or as a range, it represents the performance met by approximately 80 % of the instruments at production time. Otherwise, it represents the mean value.

Nominal values (nom.)

Characterize product performance by means of a representative value for the given parameter (e.g. nominal impedance). In contrast to typical data, a statistical evaluation does not take place and the parameter is not tested during production.

Measured values (meas.)

Characterize expected product performance by means of measurement results gained from individual samples.

Uncertainties

Represent limits of measurement uncertainty for a given measurand. Uncertainty is defined with a coverage factor of 2 and has been calculated in line with the rules of the Guide to the Expression of Uncertainty in Measurement (GUM), taking into account environmental conditions, aging, wear and tear.

Device settings and GUI parameters are designated with the format “parameter: value”.

Non-traceable specifications with limits, typical data as well as nominal and measured values are not warranted by Rohde & Schwarz.

In line with the 3GPP/3GPP2 standard, chip rates are specified in million chips per second (Mcps), whereas bit rates and symbol rates are specified in billion bits per second (Gbps), million bits per second (Mbps), thousand bits per second (kbps), million symbols per second (Msps) or thousand symbols per second (ksps), and sample rates are specified in million samples per second (Msample/s). Gbps, Mcps, Mbps, Msps, kbps, ksps and Msample/s are not SI units.

Specifications

Frequency

Frequency range	R&S®Spectrum Rider FPH model .02	5 kHz to 2 GHz
	with R&S®FPH-B3 option installed	5 kHz to 3 GHz
	with R&S®FPH-B3 and R&S®FPH-B4 options installed	5 kHz to 4 GHz
	R&S®Spectrum Rider FPH model .06	5 kHz to 6 GHz
	with R&S® FPH-B8 option installed	5 kHz to 8 GHz
	R&S®Spectrum Rider FPH model .13	5 kHz to 13.6 GHz
	with R&S® FPH-B20 option installed	5 kHz to 20 GHz
	R&S®Spectrum Rider FPH model .26	5 kHz to 26.5 GHz
with R&S® FPH-B31 option installed	5 kHz to 31 GHz	
R&S®Spectrum Rider FPH models .06/.13/.26 with R&S® FPH-B29 option installed ¹	from 5 kHz down to 100 Hz	
Frequency resolution		1 Hz

Reference frequency, internal		
Aging per year		$1 \cdot 10^{-6}$
Temperature drift	0 °C to +50 °C	$1 \cdot 10^{-6}$
Achievable initial calibration accuracy		$5 \cdot 10^{-7}$
Total reference uncertainty		(time since last adjustment · aging rate) + temperature drift + calibration accuracy

Frequency readout		
Marker resolution		1 Hz
Uncertainty		$\pm(\text{marker frequency} \cdot \text{reference uncertainty} + 10\% \cdot \text{resolution bandwidth} + \frac{1}{2}(\text{span} / (\text{sweep points} - 1) + 1 \text{ Hz}))$
Number of sweep (trace) points		711
Marker tuning frequency step size		span / 710
Frequency counter resolution		0.1 Hz
Count uncertainty	SNR > 25 dB	$\pm(\text{frequency} \cdot \text{reference uncertainty} + \frac{1}{2}(\text{last digit}))$
Frequency span		0 Hz, 10 Hz to 2/3/4/6/8/13.6/20/26.5/31 GHz
Span uncertainty		1 % (nom.)

Spectral purity SSB phase noise		
Carrier offset	30 kHz	f = 500 MHz < -88 dBc (1 Hz), -95 dBc (1 Hz) (typ.)
	100 kHz	< -98 dBc (1 Hz), -105 dBc (1 Hz) (typ.)
	1 MHz	< -118 dBc (1 Hz), -125 dBc (1 Hz) (typ.)

Sweep time

Sweep time	span = 0 Hz	1 ms to 1000 s
	10 Hz ≤ span ≤ 600 MHz	20 ms to 1000 s
	span > 600 MHz	20 ms · span / 1600 MHz to 1000 s
Uncertainty	span = 0 Hz	1 % (nom.)
	span ≥ 10 Hz	3 % (nom.)

¹ For serial number ≥ 103100. Not applicable to R&S®Spectrum Rider FPH model .02.

Bandwidths

Resolution bandwidths		
Range	-3 dB bandwidths	1 Hz to 3 MHz in 1/3 sequence
Bandwidth accuracy	$1 \text{ Hz} \leq \text{RBW} \leq 300 \text{ kHz}$	< 5 % (nom.)
	$300 \text{ kHz} < \text{RBW} \leq 1 \text{ MHz}$	< 10 % (nom.)
Selectivity 60 dB:3 dB		< 5 (nom.) (Gaussian type filters)
Video filters		
Range	-3 dB bandwidths	1 Hz to 3 MHz in 1/3 sequence

Level

Display range		displayed noise floor to +30 dBm
Maximum rated input level with RF attenuation ≥ 10 dB		
DC voltage		50 V
CW RF power	R&S®Spectrum Rider FPH model .02	33 dBm (= 2 W)
	R&S®Spectrum Rider FPH model .06/.13/.26	27 dBm (= 0.5 W)
Peak RF power (duration < 3 s)	R&S®Spectrum Rider FPH model .02	36 dBm (= 4 W)
	R&S®Spectrum Rider FPH model .06/.13/.26	30 dBm (= 1 W)
Maximum rated input level with RF attenuation < 10 dB		
DC voltage		50 V
CW RF power	R&S®Spectrum Rider FPH model .02	20 dBm (= 100 mW)
	R&S®Spectrum Rider FPH model .06/.13/.26	20 dBm (= 100 mW)
Peak RF power (duration < 3 s)	R&S®Spectrum Rider FPH model .02	23 dBm (= 200 mW)
	R&S®Spectrum Rider FPH model .06/.13/.26	23 dBm (= 200 mW)
Intermodulation		
Third-order intercept (TOI)	intermodulation-free dynamic range, signal level -20 dBm (both), RF attenuation = 0 dB, RF preamplifier = off	
	R&S®Spectrum Rider FPH model .02	
	f = 1 GHz	+7 dBm (meas.)
	f = 2.4 GHz	+10 dBm (meas.)
	R&S®Spectrum Rider FPH models .06/.13/.26	
	f = 1 GHz	+7 dBm (meas.)
	f = 4.5 GHz	+8 dBm (meas.)
	f = 9.5 GHz	+10 dBm (meas.)
	f = 12 GHz	+9 dBm (meas.)
	f = 22 GHz	+8 dBm (meas.)
f = 26.5 GHz	+10 dBm (meas.)	
Second-harmonic intercept (SHI)	RF attenuation = 0 dB, RF preamplifier = off, signal level = -40 dBm	
	R&S®Spectrum Rider FPH model .02	
	$f_{in} = 20 \text{ MHz to } 1.5 \text{ GHz}$	-60 dBc (nom.)
	$f_{in} = 1.5 \text{ GHz to } 2 \text{ GHz}$	-80 dBc (nom.)
	R&S®Spectrum Rider FPH models .06/.13/.26	
	$f_{in} = 20 \text{ MHz to } 1.5 \text{ GHz}$	-60 dBc (nom.)
	$f_{in} = 1.5 \text{ GHz to } 4 \text{ GHz}$	-90 dBc (nom.)
	$f_{in} = 4 \text{ GHz to } 10 \text{ GHz}$	-90 dBc (nom.)
	$f_{in} = 10 \text{ GHz to } 14 \text{ GHz}$	-90 dBc (nom.)
	$f_{in} = 14 \text{ GHz to } 15.4 \text{ GHz}$	-85 dBc (nom.)
Displayed average noise level (DANL)	0 dB RF attenuation, termination 50 Ω , RBW = 1 kHz, VBW = 10 Hz, sample detector, log scaling, normalized to 1 Hz	
	R&S®Spectrum Rider FPH model .02	
	preamplifier = off	
	1 MHz to 10 MHz	< -135 dBm, -142 dBm (typ.)
	10 MHz to 1 GHz	< -142 dBm, -146 dBm (typ.)
	1 GHz to 4 GHz	< -140 dBm, -144 dBm (typ.)
	preamplifier = on	
	1 MHz to 10 MHz	< -150 dBm, -160 dBm (typ.)
	10 MHz to 3 GHz	< -158 dBm, -163 dBm (typ.)
	3 GHz to 4 GHz	< -156 dBm, -161 dBm (typ.)
R&S®Spectrum Rider FPH models .06/.13/.26		
preamplifier = off		
1 MHz to 10 MHz	< -122 dBm, -130 dBm (typ.)	
10 MHz to 25 MHz	< -130 dBm, -135 dBm (typ.)	

25 MHz to 1 GHz	< -140 dBm, -145 dBm (typ.)
1 GHz to 4 GHz	< -135 dBm, -140 dBm (typ.)
4 GHz to 8 GHz	< -135 dBm, -140 dBm (typ.)
8 GHz to 19 GHz	< -135 dBm, -138 dBm (typ.)
19 GHz to 20 GHz	< -130 dBm, -138 dBm (typ.)
20 GHz to 27 GHz	< -130 dBm, -138 dBm (typ.)
27 GHz to 29 GHz	< -125 dBm, -130 dBm (typ.)
29 GHz to 31 GHz	< -120 dBm, -123 dBm (typ.)
preamplifier = on	
1 MHz to 20 MHz	1 MHz to 20 MHz
20 MHz to 1 GHz	20 MHz to 1 GHz
1 GHz to 3 GHz	1 GHz to 3 GHz
3 GHz to 4 GHz	3 GHz to 4 GHz
4 GHz to 4.5 GHz	4 GHz to 4.5 GHz
4.5 GHz to 8 GHz	4.5 GHz to 8 GHz
8 GHz to 20 GHz	8 GHz to 20 GHz
20 GHz to 27 GHz	20 GHz to 27 GHz
27 GHz to 29 GHz	27 GHz to 29 GHz
29 GHz to 31 GHz	29 GHz to 31 GHz

Immunity to interference		
Image frequencies	R&S®Spectrum Rider FPH model .02	
	$f_{in} - 2 \cdot 30.15 \text{ MHz}$	< -70 dBc (nom.)
	$f_{in} - 2 \cdot 830.15 \text{ MHz}$	< -70 dBc (nom.)
	$f < 3 \text{ GHz}, f_{in} - 2 \cdot 830.15 \text{ MHz}$	< -70 dBc (nom.)
	$f < 3 \text{ GHz}, f_{in} - 2 \cdot 4042.65 \text{ MHz}$	-60 dBc (nom.)
	$f \geq 3 \text{ GHz}, f_{in} + 2 \cdot 830.15 \text{ MHz}$	-60 dBc (nom.)
	R&S®Spectrum Rider FPH model .06/.13/.26	
	$f_{in} - 2 \cdot 30.15 \text{ MHz}$	< -70 dBc (nom.)
	$f_{in} - 2 \cdot 830.15 \text{ MHz}$	< -70 dBc (nom.)
	$f < 4 \text{ GHz}, f_{in} - 2 \cdot 830.15 \text{ MHz}$	< -70 dBc (nom.)
	$f < 4 \text{ GHz}, f_{in} + 2 \cdot 5582.35 \text{ MHz}$	< -50 dBc (nom.)
	$f < 4 \text{ GHz}, f_{in} + 2 \cdot 7230.15 \text{ MHz}$	< -50 dBc (nom.)
	$4 \text{ GHz} \leq f < 8 \text{ GHz}, f_{in} - 2 \cdot 830.15 \text{ MHz}$	< -70 dBc (nom.)
	$8 \text{ GHz} \leq f < 20 \text{ GHz}, f_{in} - 2 \cdot 830.15 \text{ MHz}$	< -70 dBc (nom.)
	$8 \text{ GHz} \leq f < 20 \text{ GHz}, f_{in} + 2 \cdot 4030.15 \text{ MHz}$	< -70 dBc (nom.)
	$8 \text{ GHz} \leq f < 20 \text{ GHz}, f_{in} + 2 \cdot 5582.35 \text{ MHz}$	< -70 dBc (nom.)
	$8 \text{ GHz} \leq f < 20 \text{ GHz}, f_{in} + 2 \cdot 7230.15 \text{ MHz}$	< -70 dBc (nom.)
	$20 \text{ GHz} \leq f < 26.5 \text{ GHz}, f_{in} - 2 \cdot 4030.15 \text{ MHz}$	< -40 dBc (nom.)
	$26.5 \text{ GHz} \leq f < 28.5 \text{ GHz}, f_{in} - 2 \cdot 7230.15 \text{ MHz}$	< -60 dBc (nom.)
	Intermediate frequencies	R&S®Spectrum Rider FPH model .02
30.15 MHz, 830.15 MHz, 4042.65 MHz		< -60 dBc (nom.)
R&S®Spectrum Rider FPH models .06/.13/.26		
30.15 MHz, 830.15 MHz, 4030.15 MHz		< -60 dBc (nom.)
5582.35 MHz		< -50 dBc (nom.)
7230.15 MHz	< -40 dBc (nom.)	
Other interfering signals, signal level – RF attenuation < -30 dBm	R&S®Spectrum Rider FPH model .02	
	$f \leq 3 \text{ GHz}, \text{ spurious at } f_{in} - 2021.325 \text{ MHz}$	< -60 dBc (nom.)
	R&S®Spectrum Rider FPH models .06/.13/.26	
	$f < 4 \text{ GHz}, \text{ spurious at } f_{in} + 2015.075 \text{ MHz}$	< -60 dBc (nom.)
	$4 \text{ GHz} \leq f < 8 \text{ GHz}, f_{in} - 415.075 \text{ MHz}$	< -60 dBc (nom.)
	$8 \text{ GHz} \leq f < 20 \text{ GHz}, f_{in} + 2015.075 \text{ MHz}$	< -60 dBc (nom.)
	$8 \text{ GHz} \leq f < 20 \text{ GHz}, f_{in} + 2791.175 \text{ MHz}$	< -60 dBc (nom.)

	8 GHz ≤ f < 20 GHz, f _{in} + 3615.075 MHz	< -60 dBc (nom.)
	20 GHz ≤ f < 26.5 GHz, f _{in} - 2015.075 MHz	< -60 dBc (nom.)
	26.5 GHz ≤ f < 28.5 GHz, f _{in} - 3615.075 MHz	< -60 dBc (nom.)
Other interfering signals, related to local oscillators	f = receive frequency	
	R&S®Spectrum Rider FPH model .02	
	Δf ≥ 300 kHz	< -60 dBc (nom.)
	R&S®Spectrum Rider FPH models .06/.13/.26	
	Δf ≥ 300 kHz, Δf ≤ 1600 MHz	< -60 dBc (nom.) except otherwise stated
	Δf ≤ -422.5 MHz, 21440 MHz ≤ f _{in} < 23400 MHz	< -35 dBc (nom.)
	Δf ≥ 1115 MHz, 23400 MHz ≤ f _{in} < 24400 MHz	< -40 dBc (nom.)
Residual spurious response	input matched with 50 Ω, without input signal, RBW ≤ 30 kHz, f ≥ 3 MHz, RF attenuation = 0 dB	< -90 dBm (nom.)

Level display		
Logarithmic level axis		1/2/3/5/10/20/30/50/100/120/150 dB, 10 divisions
Linear level axis		0 % to 100 %, 10 divisions
Number of traces		2
Trace detectors		max. peak, min. peak, auto peak, sample, RMS
Trace functions		clear/write, max. hold, min. hold, average, view
Setting range of reference level		-130 dBm to +30 dBm
Units of level axis		dBm, dBmV, dBμV, V, W
Level measurement uncertainty		
Absolute level uncertainty at 100 MHz	in the temperature range of +20 °C to +30 °C	< 0.3 dB
	in the temperature range of +20 °C to +30 °C	
Frequency response ²	100 Hz ≤ f < 5 kHz	< 3.0 dB (nom.) (only with R&S®FPH-B29 option installed, preamplifier off and attenuator settings ≤ 15 dB)
	5 kHz ≤ f < 10 MHz	< 1.5 dB (nom.)
	10 MHz ≤ f < 8 GHz	< 1 dB
	8 GHz ≤ f < 20 GHz	< 1.5 dB
	20 GHz ≤ f ≤ 31 GHz	< 2 dB
Attenuator uncertainty		< 0.3 dB
Uncertainty of reference level setting		< 0.1 dB (nom.)
Display nonlinearity	SNR > 16 dB, 0 dB to -50 dB, logarithmic level display	< 0.3 dB
Bandwidth switching uncertainty	reference: RBW = 10 kHz	< 0.1 dB (nom.)
Total measurement uncertainty	95 % confidence level, +20 °C to +30 °C, SNR > 16 dB, 0 dB to -50 dB below reference level, RF attenuation auto	
	10 MHz ≤ f ≤ 31 GHz	< 1.25 dB, 0.5 dB (typ.)

Trigger functions

Trigger		
Trigger source		free run, video, external
External trigger level threshold	low → high transition	2.4 V
	high → low transition	0.7 V
	maximum	3.0 V
Gated Trigger		
Gate delay		1 μs to 100 s, min. resolution 1 μs (or 1 % of delay)
Gate length		1 μs to 100 s, min. resolution 1 μs (or 1 % of gate length)

² For specifications with R&S®FPH-B100 option installed, see section "R&S®FPH-B100 N type RF input connector for model .26".

Inputs and outputs

RF input		
Impedance		50 Ω (nom.)
Connector	R&S®Spectrum Rider FPH models .02/.06/.13	type N, female
	R&S®Spectrum Rider FPH model .26	PC 3.5 mm male
VSWR ²	R&S®Spectrum Rider FPH model .02	
	100 kHz $\leq f \leq$ 1 GHz	< 1.5 (nom.)
	1 GHz < f \leq 4 GHz	< 2 (nom.)
	R&S®Spectrum Rider FPH models .06/.13/.26	
	100 kHz $\leq f \leq$ 100 MHz	< 2 (nom.)
	100 MHz $\leq f \leq$ 1 GHz	< 1.5 (nom.)
	1 GHz < f \leq 31 GHz	< 2 (nom.)
Input attenuator	RF input only	0 dB to 40 dB in 5 dB steps
AF output		
AF demodulation types		AM and FM
Connector		3.5 mm mini jack
Output impedance		32 Ω (nom.)
Voltage (open circuit)		adjustable from 0 V to > 100 mV (RMS)
External reference, external trigger		
Connector		BNC, 50 Ω
Mode		external reference, external trigger
External reference	required level	0 dBm
	frequency	10 MHz
External trigger threshold	low \rightarrow high transition	2.4 V
	high \rightarrow low transition	0.7 V

General data

Manual operation		
Languages		Chinese, Chinese Traditional, English, French, German, Italian, Hungarian, Japanese, Korean, Portuguese, Russian, Spanish
Remote control		
Command set		SCPI 1997.0
LAN interface		10/100BASE-T, RJ-45
USB		mini B plug, version 2.0
Display		
Resolution		WVGA, 800 x 480 pixel
Audio		
Speaker		internal, external headphone supported
USB interface		type A plug, version 2.0
	number of interfaces	2
Mass memory	not supplied	USB flash drive, USB version 1.1 or 2.0, size \leq 32 Gbyte
		micro SD card, size \leq 32 Gbyte
Data storage	internal	> 160 instrument settings and traces
	on USB stick or micro SD card, \geq 1 Gbyte	> 10000 instrument settings and traces
Temperature	operating temperature range	-10 $^{\circ}$ C to +55 $^{\circ}$ C
	storage temperature range	-40 $^{\circ}$ C to +70 $^{\circ}$ C
	battery charging mode	0 $^{\circ}$ C to +40 $^{\circ}$ C
Climatic loading	relative humidity	+25/+55 $^{\circ}$ C at 95 % relative humidity, in line with EN 60068-2-30
	protection class	IP51
Altitude	operating with battery	15 000 m (49 210 ft)
	operating with AC to DC adapter	3000 m (9840 ft)
Mechanical resistance		
Vibration	sinusoidal	in line with EN 60068-2-6, MIL-PRF-28800F class 2
	random	in line with EN 60068-2-64, MIL-PRF-28800F class 2
Shock		40 g shock spectrum, in line with MIL-STD-810E, method 516.4 procedure 1, MIL-PRF-28800F

Power supply		
R&S®HA-Z301 AC power supply	input specifications	100 V to 240 V AC, 50 Hz/60 Hz, 1.0 A to 0.5 A
	output specifications	15 V, 2.67 A, max. 40 W
	operating temperature range	-30 °C to +60 °C
	storage temperature range	-40 °C to +85 °C
	test marks	CE, UL, PSE, TUV
External DC voltage		14.65 V to 15.45 V
Battery		lithium-ion battery
Capacity	R&S®HA-Z306	72 Wh
Voltage		11.25 V (nom.)
Operating time with new, fully charged battery	R&S®HA-Z306	
	model .02	8 h
	model .06	7 h
	models .13/.26	6 h
Charging time	instrument switched off or charge with R&S®HA-Z303 battery charger	3.5 h
	instrument switched on	4 h
Life time	charging cycles	> 80 % or more of its initial capacity after 300 charge/discharge
Power consumption	model .02	8 W (meas.)
	model .06	10 W (meas.)
	models .13/.26	12 W (meas.)
Safety		IEC 61010-1, EN 61010-1, UL 61010-1 (Third Edition), CAN/CSA-C22.2 No. 61010-1-12
Test mark		VDE, CSA, CSA-NRTL
EMC	in line with European EMC Directive 2004/108/EC	<ul style="list-style-type: none"> EN 61326-1 class B (emission) CISPR 11/EN 55011/group 1 class B (emission) EN 61326-1 table 2 (immunity, industrial)
Dimensions	W x H x D	202 mm x 294 mm x 76 mm (8.0 in x 11.6 in x 3 in)
Weight		2.5 kg (5.5 lb)
Recommended calibration interval		1 year

Equivalence of specifications for different R&S®FPH part numbers

- The specifications for part number 1321.1111.02 are equivalent to part number 1321.1111.52 and 1321.1111P01.
- The specifications for part number 1321.1111.06 are equivalent to part number 1321.1111.56 and 1321.1111P04.
- The specifications for part number 1321.1111.13 are equivalent to part number 1321.1111.63 and 1321.1111P06.
- The specifications for part number 1321.1111.26 are equivalent to part number 1321.1111.76 and 1321.1111P08.

R&S®FPH-B100 type N RF input connector for model .26

Frequency range	R&S®Spectrum Rider FPH model .26 with R&S®FPH-B100 option (R&S®FPH-B31 option is not available in combination with R&S®FPH-B100 option)	5 kHz to 26.5 GHz
Frequency response	in the temperature range of +20 °C to +30 °C	
	$5 \text{ kHz} \leq f < 10 \text{ MHz}$	< 1.5 dB (nom.)
	$10 \text{ MHz} \leq f < 8 \text{ GHz}$	< 1 dB
	$8 \text{ GHz} \leq f < 20 \text{ GHz}$	< 2 dB
	$20 \text{ GHz} \leq f \leq 26.5 \text{ GHz}$	< 2.5 dB
VSWR	$100 \text{ kHz} \leq f \leq 100 \text{ MHz}$	< 2 (nom.)
	$100 \text{ MHz} < f \leq 1 \text{ GHz}$	< 1.5 (nom.)
	$1 \text{ GHz} < f \leq 15.7 \text{ GHz}$	< 2 (nom.)
	$15.7 \text{ GHz} < f \leq 26.5 \text{ GHz}$	< 2.7 (nom.)

R&S®FPH-K7 modulation analysis

Measurement of analog modulation signals (AM, FM)		
Center frequency	R&S®Spectrum Rider FPH model .02	500 KHz to 2 GHz
	with R&S®FPH-B3 option installed	500 KHz to 3 GHz
	with R&S®FPH-B3 and R&S®FPH-B4 options installed	500 KHz to 4 GHz
	R&S®Spectrum Rider FPH model .06	500 KHz to 6 GHz
	with R&S®FPH-B8 option installed	500 KHz to 8 GHz
	R&S®Spectrum Rider FPH model .13	500 KHz to 13.6 GHz
	with R&S®FPH-B20 option installed	500 KHz to 20 GHz
Demodulation bandwidth	R&S®Spectrum Rider FPH model .26	500 KHz to 26.5 GHz
	with R&S®FPH-B31 option installed	500 KHz to 31 GHz
Bandwidth accuracy		2 MHz, 1 MHz, 500 kHz, 300 kHz, 200 kHz, 100 kHz, 50 kHz, 30 kHz, 20 kHz, 10 kHz (nom.)
Display	AM	< ±5% (nom.)
Display	FM	carrier power, carrier frequency offset, AM modulation depth, modulation frequency, THD, SINAD, SNR
		carrier power, carrier frequency offset, FM deviation, modulation frequency, THD, SINAD, SNR

Carrier power		
Carrier power measurement accuracy		add 0.2 dB, see section level measurement uncertainty
Display resolution		0.1 dB

AF (modulation frequency) ³		
Range	AM	20 Hz to 100 kHz (nom.)
	FM	20 Hz to 200 kHz (nom.)
Resolution		1 Hz
Measurement uncertainty	$1 \text{ kHz} \leq \text{AF} \leq 200 \text{ kHz}$	±(1 % of measured value) (nom.)
	$20 \text{ Hz} \leq \text{AF} < 1 \text{ kHz}$	±1 Hz (nom.)
AF filters		
Lowpass	audio decimation	bypass, 1/10, 1/30, 1/100 (nom.)
De-emphasis	FM demodulation and demodulation bandwidth 200 kHz and 300 kHz	off, 50 µs, 75 µs (nom.)

AM demodulation ⁴		
Measurement range	modulation depth	2 % to 100 % (nom.)
Modulation depth uncertainty		±(4 %) (nom.)

FM demodulation ⁵		
Measurement range	frequency deviation	10 kHz to 400 kHz (nom.), max. $0.4 \cdot \text{demodulation bandwidth}$
Deviation uncertainty		±(0.04 · (AF + deviation)) (nom.)

Modulation distortion ^{3, 4, 5}		
Measurement functions		THD, SINAD
Measurement range		-50 dB to 0 dB (THD)
		0 dB to 50 dB (SINAD, AM)
		0 dB to 40 dB (SINAD, FM)
Display resolution		0.1 dB
Measurement uncertainty		1 dB (nom.)
AF frequency range		20 Hz to 100 kHz (nom.)

³ Minimum and maximum detectable audio frequency and harmonics depend on the demodulation bandwidth and audio filter settings.

⁴ Modulation frequency 1 kHz sine, AM modulation depth 50 %, carrier level 0 dBm, center frequency = 499 MHz, reference level 6 dBm, demodulation bandwidth = 20 kHz, SNR > 60 dB, audio filter = bypass.

⁵ Modulation frequency 1 kHz sine, FM deviation = 75 kHz, carrier level 0 dBm, center frequency = 499 MHz, reference level 6 dBm, demodulation bandwidth = 300 kHz, SNR > 60 dB, audio filter = 1/10, deemphasis = off.

Measurement of digital modulation signals (ASK, FSK)		
Center frequency	R&S®Spectrum Rider FPH model .02	10 MHz to 2 GHz
	with R&S®FPH-B3 option installed	10 MHz to 3 GHz
	with R&S®FPH-B3 and R&S®FPH-B4 options installed	10 MHz to 4 GHz
	R&S®Spectrum Rider FPH model .06	10 MHz to 6 GHz
	with R&S®FPH-B8 option installed	10 MHz to 8 GHz
	R&S®Spectrum Rider FPH model .13	10 MHz to 13.6 GHz
	with R&S®FPH-B20 option installed	10 MHz to 20 GHz
Demodulation bandwidth	R&S®Spectrum Rider FPH model .26	10 MHz to 26.5 GHz
	with R&S®FPH-B31 option installed	10 MHz to 31 GHz
Display	ASK diagram	400 Hz to 2 MHz auto-set corresponding to signal and demodulation bandwidth requirements eye diagram, symbols, modulation depth, modulation error
	ASK numerical results	carrier power, carrier frequency error, modulation depth and index, modulation error
	FSK diagram	eye diagram, symbols, modulation deviation, modulation error
	FSK numerical results	carrier power, carrier frequency error, frequency deviation, modulation error, magnitude error

Demodulation parameters		
Modulation and demodulation filters	transmit filter	root raised cosine (RRC) raised cosine (RC) Gaussian (GAUSS) unfiltered ⁶ (measurement and reference filters are internally adapted to signal parameters)
Points/symbol		4, 8, 16 internally adapted to signal parameters
Filter length		internally adapted to signal parameters
Demodulation length		20 symbols to max. 1000 symbols (at 4 points/symbol)

Carrier power		
Carrier power measurement accuracy		add 0.2 dB, see section level measurement uncertainty
Carrier power range		-30 dBm to +20 dBm (nom.)
Display resolution		0.1 dB

ASK demodulation⁷		
Measurement range	symbol rate	1 kHz to 100 kHz (nom.)
	modulation depth	5 % to 95 % (nom.)
Modulation depth uncertainty		±(4 %) (nom.)
Display resolution		0.1 %

⁶ Reference signal is generated with a Gaussian filter, BT = 3.

⁷ ASK modulation index 50 %, symbol rate = 100 kHz, Gaussian BT = 1.0, modulation signal PSBS.

FSK demodulation ⁸		
Measurement range	symbol rate	1 kHz to 100 kHz (nom.)
	frequency deviation	1 kHz to 400 kHz (nom.)
	symbol rate	
	1 kHz to 20 kHz	$1 \leq \beta^9 \leq 20$
	> 20 kHz to 50 kHz	$1 \leq \beta \leq 8$
	> 50 kHz to 100 kHz	$1 \leq \beta \leq 4$
Accuracy		$\pm (4 \%)$ (nom.)
Display resolution		0.1 Hz

R&S®FPH-K19 channel power meter

Frequency range	R&S®Spectrum Rider FPH model .02	5 kHz to 2 GHz
	with R&S®FPH-B3 option installed	5 kHz to 3 GHz
	with R&S®FPH-B3 and R&S®FPH-B4 options installed	5 kHz to 4 GHz
	R&S®Spectrum Rider FPH model .06	5 kHz to 6 GHz
	with R&S®FPH-B8 option installed	5 kHz to 8 GHz
	R&S®Spectrum Rider FPH model .13	5 kHz to 13.6 GHz
	with R&S®FPH-B20 option installed	5 kHz to 20 GHz
	R&S®Spectrum Rider FPH model .26	5 kHz to 26.5 GHz
	with R&S®FPH-B31 option installed	5 kHz to 31 GHz
Channel bandwidth		100 kHz to 1 GHz
Amplitude		offset, dB relative, zeroing
Unit		dBm, W
Limits		on/off, upper limit, lower limit, beep on fail
Measurement range		-120 dBm to +30 dBm
Level measurement uncertainty		
Absolute level uncertainty at 100 MHz	+20 °C to +30 °C	< 0.3 dB
Frequency response (+20 °C to +30 °C)	100 kHz ≤ f < 10 MHz	< 1.5 dB (nom.)
	10 MHz ≤ f ≤ 4 GHz	< 1.25 dB

R&S®FPH-K29 pulse measurements with power sensor

In combination with one of the R&S®NRP-Z81, R&S®NRP-Z85 or R&S®NRP-Z86 power sensors, the R&S®Spectrum Rider FPH supports measurements on pulsed signals. The achievable RF performance is documented in the data sheet specifications of the R&S®NRP-Z81/-Z85/-Z86 power sensors. The list below shows which measurements are supported by the R&S®FPH-K29.

Measurements	R&S®FPH-K29
Pulse power parameters	•
Peak power	•
Pulse top power	•
Average power	•
Base power	•
Minimum power	•
Positive overshoot	•
Negative overshoot	•
Pulse timing parameters	•
Pulse duration	•
Pulse period	•
Pulse start/stop time	•
Rise/fall time	•
Duty cycle	•

⁸ FSK modulation deviation 100 kHz, symbol rate = 100 kHz, Gaussian BT = 1.0, modulation signal PRBS.

⁹ Beta is the ratio of frequency deviation to symbol rate.

R&S®FPH-K43 receiver mode and channel scan measurement application

The specifications below apply to the R&S®Spectrum Rider FPH. They are based on the data sheet specifications of the R&S®Spectrum Rider FPH, have not been checked separately and are not verified during instrument calibration.

Measurements	R&S®FPH-K43
Fixed frequency	•
Frequency scan	•
Channel scan	•
User defined channel list	•
EMI precompliance	•
CISPR bandwidths	•
CISPR detectors	•

Frequency range		see basic instrument
Measurement modes		fixed frequency, frequency scan, channel scan
Frequency scan stepsize		
Scan stepsize		100 Hz to max. frequency
Maximum number of steps		10000
Channel scan		
Channel spacing		user definable
Maximum number of channels		10000
Resolution bandwidths	-3 dB bandwidths	1 Hz to 3 MHz in 1/3 sequence
	-6 dB CISPR bandwidths	200 Hz, 9 kHz, 120 kHz, 1 MHz
Detectors		max. peak, average, RMS, quasi-peak
Level		see basic instrument

R&S®FPH-K57 advanced gated trigger measurement

The specifications below apply to the R&S®Spectrum Rider FPH. They are based on the data sheet specifications of the R&S®Spectrum Rider FPH, have not been checked separately and are not verified during instrument calibration. Advanced gated trigger measurements are used for analysis of periodic time domain signal measurements and applicable only to the below mentioned measurement modes.

Measurements	R&S®FPH-K57
Occupied bandwidth (OBW)	•
Spectrum emission mask (SEM)	•
Adjacent channel leakage ratio (ACLR)	•

Frequency range		see basic instrument
Resolution bandwidths	-3 dB bandwidths	30 KHz to 3 MHz in 1/3 sequence
Video bandwidths		30 KHz to 3 MHz in 1/3 sequence
Detectors		see basic instrument
Auto gate detection	minimum distance, high level to low level	10 dB

R&S®HA-Z350 log-periodic OEM antenna

Frequency range		700 MHz to 4 GHz
Gain		4 dBi (typ.)
Impedance		50 Ω
VSWR		< 1:2 (nom.)
Connector type		SMA (f)
Dimensions	W x H x D	340 mm x 200 mm x 25 mm (13.3 in x 7.9 in x 1 in)
Weight		270 g (0.6 lb)
Accessories supplied	hardcase with foam, typical calibration data in 10 MHz steps, pistol grip with mini-tripod function, one set of SMA toolset	

R&S®FSH-Z14 directional power sensor ¹⁰

Frequency range		25 MHz to 1 GHz
Power measurement range		30 mW to 300 W
VSWR referenced to 50 Ω		< 1.06
Power handling capacity	depending on temperature and matching (see diagram on page 15)	100 W to 1000 W
Insertion loss		< 0.06 dB
Directivity		> 30 dB


Average power		
Power measurement range		
CW, FM, PM, FSK, GMSK	CF: ratio of peak envelope	30 mW to 300 W
Modulated signals	power to average power	30 mW to 300 W/CF
Measurement uncertainty		
25 MHz to 40 MHz	sine signal	4.0 % of measured value (0.17 dB)
40 MHz to 1 GHz	+18 °C to +28 °C, no zero offset	3.2 % of measured value (0.14 dB)
Zero offset	after zeroing	±4 mW
Range of typical measurement error with modulation	FM, PM, FSK, GMSK	0 % of measured value (0 dB)
	AM (80 %)	±3 % of measured value (±0.13 dB)
	two CW carriers with identical power	±2 % of measured value (±0.09 dB)
	EDGE, TETRA	±0.5 % of measured value (±0.02 dB) ¹¹
Temperature coefficient	25 MHz to 40 MHz	0.40 %/K (0.017 dB/K)
	40 MHz to 1 GHz	0.25 %/K (0.011 dB/K)

Maximum peak envelope power		
Power measurement range		
Video bandwidths	4 kHz	0.4 W to 300 W
	200 kHz	1 W to 300 W
	600 kHz	2 W to 300 W
Measurement uncertainty	same as for average power plus effect of peak hold circuit	+18 °C to +28 °C
Error limits of peak hold circuit for burst signals	duty cycle ≥ 0.1 and repetition rate ≥ 100/s	
	video bandwidth 4 kHz	±(3 % of measured value + 0.05 W) starting from a burst width of 200 μs
	video bandwidth 200 kHz	±(3 % of measured value + 0.20 W) starting from a burst width of 4 μs
	video bandwidth 600 kHz	±(7 % of measured value + 0.40 W) starting from a burst width of 2 μs
	20/s ≤ repetition rate < 100/s	plus ±(1.6 % of measured value + 0.15 W)
	0.001 ≤ duty cycle < 0.1	plus ±0.10 W
Temperature coefficient	25 MHz to 40 MHz	0.50 %/K (0.022 dB/K)
	40 MHz to 1 GHz	0.35 %/K (0.015 dB/K)


Load matching		
Matching measurement range		
Return loss		0 dB to 23 dB
VSWR		> 1.15
Minimum forward power	specifications complied with ≥ 0.4 W	0.06 W

Dimensions and weight		
Dimensions (W × H × D)		120 mm × 95 mm × 39 mm (4.72 in × 3.74 in × 1.53 in)
	connecting cable	1.5 m (59 in)
Weight		0.65 kg (1.43 lb)

¹⁰ Requires R&S®FSH-Z144 adapter cable.¹¹ If standard is selected on the R&S®Spectrum Rider FPH.

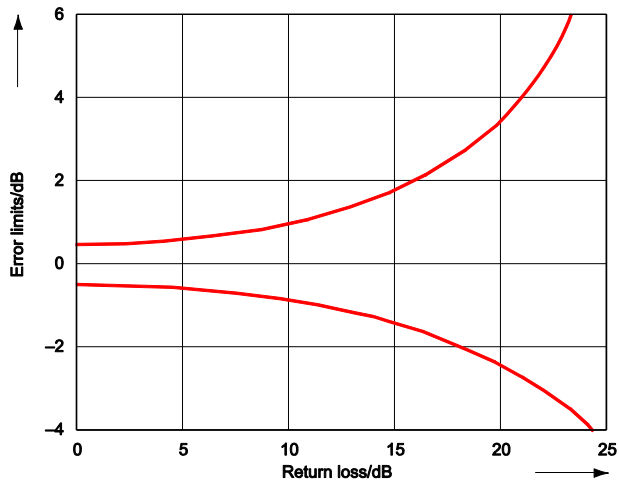

Error limits for matching measurements

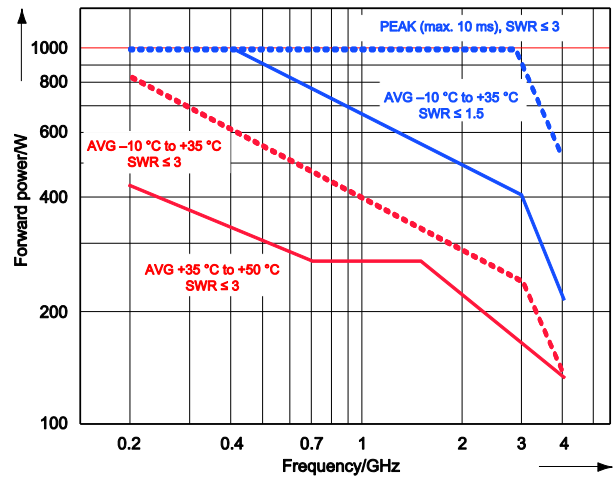

Power handling capacity

R&S®FSH-Z44 directional power sensor ¹²

Frequency range		200 MHz to 4 GHz
Power measurement range		30 mW to 300 W
VSWR referenced to 50 Ω	200 MHz to 3 GHz	< 1.07
	3 GHz to 4 GHz	< 1.12
Power handling capacity	depending on temperature and matching (see diagram on page 17)	120 W to 1000 W
Insertion loss	200 MHz to 1.5 GHz	< 0.06 dB
	1.5 GHz to 4 GHz	< 0.09 dB
Directivity	200 MHz to 3 GHz	> 30 dB
	3 GHz to 4 GHz	> 26 dB

Average power		
Power measurement range	CF: ratio of peak envelope power to average power	
	CW, FM, PM, FSK, GMSK	30 mW to 300 W
	LTE, 3GPP WCDMA, cdmaOne, CDMA2000®, DAB, DVB-T	30 mW to 120 W
	other modulated signals	30 mW to 300 W/CF
Measurement uncertainty	sine signal, +18 °C to +28 °C, no zero offset	
	200 MHz to 300 MHz	4.0 % of measured value (0.17 dB)
	300 MHz to 4 GHz	3.2 % of measured value (0.14 dB)
Zero offset	after zeroing	±4 mW
Range of typical measurement error with modulation	FM, PM, FSK, GMSK	0 % of measured value (0 dB)
	AM (80 %)	±3 % of measured value (±0.13 dB)
	two CW carriers with identical power	±2 % of measured value (±0.09 dB)
	π/4-DQPSK	±2 % of measured value (±0.09 dB)
	EDGE	±0.5 % of measured value (±0.02 dB) ¹³
	cdmaOne, DAB	±1 % of measured value (±0.04 dB) ⁹
	3GPP WCDMA, CDMA2000®	±2 % of measured value (±0.09 dB) ⁹
Temperature coefficient	DVB-T	±2 % of measured value (±0.09 dB) ⁹
	200 MHz to 300 MHz	0.40 %/K (0.017 dB/K)
	300 MHz to 4 GHz	0.25 %/K (0.011 dB/K)

Maximum peak envelope power		
Power measurement range		
DAB, DVB-T, cdmaOne, CDMA2000®, 3GPP WCDMA		4 W to 300 W
Other signals at video bandwidth	4 kHz	0.4 W to 300 W
	200 kHz	1 W to 300 W
	4 MHz	2 W to 300 W
Measurement uncertainty	+18 °C to +28 °C	same as for average power plus effect of peak hold circuit
Error limits of peak hold circuit for burst signals	duty cycle ≥ 0.1 and repetition rate ≥ 100/s	
	video bandwidth 4 kHz	±(3 % of measured value + 0.05 W) starting from a burst width of 100 μs
	video bandwidth 200 kHz	±(3 % of measured value + 0.20 W) starting from a burst width of 4 μs
	video bandwidth 4 MHz	±(7 % of measured value + 0.40 W) starting from a burst width of 1 μs
	20/s ≤ repetition rate < 100/s	plus ±(1.6 % of measured value + 0.15 W)
	0.001 ≤ duty cycle < 0.1	plus ±0.10 W
	burst width ≥ 0.5 μs	plus ±5 % of measured value
Range of typical measurement error of peak hold circuit	burst width ≥ 0.2 μs	plus ±10 % of measured value
	video bandwidth 4 MHz and standard selected on the R&S®FPH4/8/13/20	
	cdmaOne, DAB	±(5 % of measured value + 0.4 W)
Temperature coefficient	DVB-T, CDMA2000®, 3GPP WCDMA	±(15 % of measured value + 0.4 W)
	200 MHz to 300 MHz	0.50 %/K (0.022 dB/K)
	300 MHz to 4 GHz	0.35 %/K (0.015 dB/K)

¹² Requires R&S®FSH-Z144 adapter cable.


¹³ If standard is selected on the R&S®Spectrum Rider FPH.

Load matching


Matching measurement range		
Return loss	200 MHz to 3 GHz	0 dB to +23 dB
VSWR	3 GHz to 4 GHz	0 dB to +20 dB
VSWR	200 MHz to 3 GHz	> 1.15
	3 GHz to 4 GHz	> 1.22
Minimum forward power	specifications complied with ≥ 0.2 W	0.03 W

Dimensions and weight

Dimensions (W x H x D)		120 mm x 95 mm x 39 mm (4.72 in x 3.74 in x 1.53 in)
	connecting cable	1.5 m (59 in)
Weight		0.65 kg (1.43 lb)

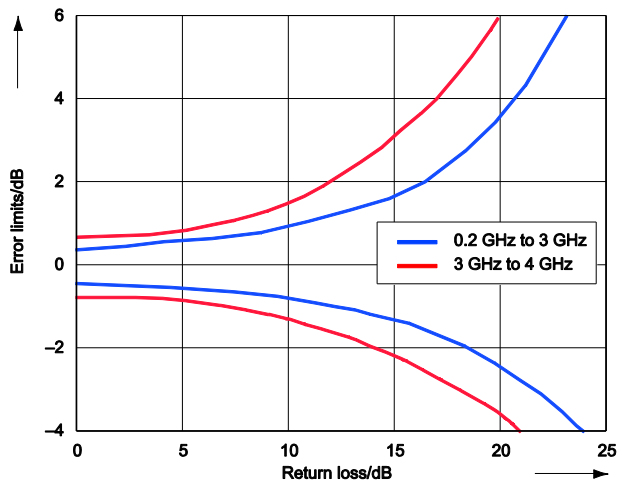

Error limits for matching measurements

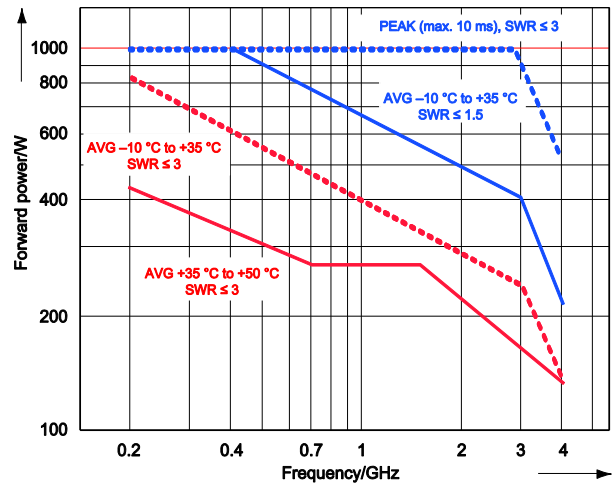

Power handling capacity

Ordering information

Designation	Type	Order No.
Handheld spectrum analyzer, 5 kHz to 2 GHz	R&S®Spectrum Rider FPH	1321.1111.02
Handheld spectrum analyzer, 5 kHz to 6 GHz	R&S®Spectrum Rider FPH	1321.1111.06
Handheld spectrum analyzer, 5 kHz to 13.6 GHz	R&S®Spectrum Rider FPH	1321.1111.13
Handheld spectrum analyzer, 5 kHz to 26.5 GHz	R&S®Spectrum Rider FPH	1321.1111.26
Accessories supplied		
Lithium-ion battery pack, USB cable, AC power supply with country specific adapters for EU, GB, US, AUS, CH, documentation, quick start guide, side strap		

Options

Designation	Type	Order No.
Spectrum analyzer frequency upgrade, 2 GHz to 3 GHz ¹⁴	R&S®FPH-B3	1321.0667.02
Spectrum analyzer frequency upgrade, 3 GHz to 4 GHz ¹⁴ (requires R&S®FPH-B3)	R&S®FPH-B4	1321.0673.02
Spectrum analyzer frequency upgrade, 6 GHz to 8 GHz ¹⁵	R&S®FPH-B8	1321.0767.02
Spectrum analyzer frequency upgrade, 13.6 GHz to 20 GHz ¹⁶	R&S®FPH-B20	1321.0773.02
Spectrum analyzer frequency upgrade, 26.5 GHz to 31 GHz ^{17, 18}	R&S®FPH-B31	1321.0780.02
Spectrum analyzer preamplifier, 5 kHz to 4 GHz ¹⁰	R&S®FPH-B22	1321.0680.02
Spectrum analyzer preamplifier, 5 kHz to 8 GHz ¹¹	R&S®FPH-B23	1321.0867.02
Spectrum analyzer preamplifier, 5 kHz to 20 GHz ¹²	R&S®FPH-B24	1321.0850.02
Spectrum analyzer preamplifier, 5 kHz to 31 GHz ¹³	R&S®FPH-B25	1321.0873.02
Type N RF input connector for model .26 (factory installed) ¹⁴	R&S®FPH-B100	1321.0596.02
Spectrum analyzer 100 Hz frequency extension, from 5 kHz down to 100 Hz ¹⁹	R&S®FPH-B29	1334.8532.02
Analog modulation analysis AM, FM, ASK, FSK	R&S®FPH-K7	1321.0696.02
Power sensor support	R&S®FPH-K9	1321.0709.02
Interference analysis	R&S®FPH-K15	1321.0715.02
Signal strength mapping	R&S®FPH-K16	1321.0615.02
Channel power meter	R&S®FPH-K19	1321.0721.02
Pulse measurements with power sensor	R&S®FPH-K29	1321.0738.02
Receiver mode and channel scanner	R&S®FPH-K43	1321.0621.02
Advanced gated trigger measurements	R&S®FPH-K57	1321.1586.02

Extras

Designation	Type	Order No.
Battery charger for R&S®HA-Z306 ²⁰	R&S®HA-Z303	1321.1328.02
Lithium-ion battery pack, 6.4 Ah	R&S®HA-Z306	1321.1334.02
Spare power supply, incl. mains plug for EU, GB, US, AUS, CH	R&S®HA-Z301	1321.1386.02
Car adapter	R&S®HA-Z302	1321.1340.02
Carrying holster	R&S®HA-Z322	1321.1370.02
Rainproof carrying holster	R&S®HA-Z322	1321.1370.03
Soft carrying bag	R&S®HA-Z220	1309.6175.00
Hardcase	R&S®HA-Z321	1321.1357.02
Hard shell protective carrying case	R&S®RTH-Z4	1326.2774.02
Headphones	R&S®FSH-Z36	1145.5838.02
Spare USB cable	R&S®HA-Z211	1309.6169.00
Spare Ethernet cable	R&S®HA-Z210	1309.6152.00

¹⁴ Applicable only to base unit with order no. 1321.1111.02.

¹⁵ Applicable only to base unit with order no. 1321.1111.06.

¹⁶ Applicable only to base unit with order no. 1321.1111.13.

¹⁷ Applicable only to base unit with order no. 1321.1111.26.

¹⁸ R&S®FPH-B31 option is not available in combination with R&S®FPH-B100 option.

¹⁹ For serial number \geq 103100. Not applicable to R&S®Spectrum Rider FPH model .02.

²⁰ The battery charger is dedicated for charging an additional battery outside the instrument. The battery can be charged via the instrument as well.

Antennas and antenna accessories

Designation	Type	Order No.
Yagi antenna, 1710 MHz to 1990 MHz	R&S®HA-Z1900	1328.6825.02
Yagi antenna, 824 MHz to 960 MHz	R&S®HA-Z900	1328.6283.02
RF cable (length: 1 m), DC to 6 GHz, type N (m) – type N (m) connectors	R&S®HA-Z901	3626.2757.02
Carrying bag, for R&S®HA-Z900 or R&S®HA-Z1900 Yagi antenna	R&S®HA-Z902	1328.6883.02
Handheld directional antenna (antenna handle)	R&S®HE400BC	4104.6000.04
Cable set for R&S®HE400BC	R&S®HE400-KB	4104.7770.04
Handheld directional antenna (antenna handle)	R&S®HE400	4104.6000.02
Handheld directional microwave antenna (antenna handle)	R&S®HE400MW	4104.6000.03
Cable set for R&S®HE400 and R&S®HE400MW (requires R&S®HE300USB)	R&S®HE400-K	4104.7770.02
HF antenna module, 8.3 kHz to 30 MHz	R&S®HE400HF	4104.8002.02
VHF antenna module, 20 MHz to 200 MHz	R&S®HE400VHF	4104.8202.02
UWB antenna module, 30 MHz to 6 GHz	R&S®HE400UWB	4104.6900.02
Log-periodic antenna module, 450 MHz to 8 GHz	R&S®HE400LP	4104.8402.02
Cellular antenna module, 700 MHz to 2500 MHz	R&S®HE400CEL	4104.7306.02
S band and C band antenna module, 1.7 GHz to 6 GHz	R&S®HE400SCB	4104.7606.02
SHF antenna module, 5 GHz to 20 GHz (with R&S®HE400BC and R&S®HE400MW antenna handle)	R&S®HE400SHF	4104.8602.02
USB adapter, for R&S®HE400 handheld directional antenna	R&S®HE300USB	4080.9440.02
Log-periodic OEM antenna, 700 MHz to 4 GHz	R&S®HA-Z350	1321.1405.02
RF cable (length: 1 m), DC to 8 GHz, armored, type N (m) – type N (f) connectors	R&S®FSH-Z320	1309.6600.00
RF cable (length: 3 m), DC to 8 GHz, armored, type N (m) – type N (f) connectors	R&S®FSH-Z321	1309.6617.00
GPS receiver for R&S®Spectrum Rider FPH	R&S®HA-Z340	1321.1392.02
Portable EMF measurement system, hard case	R&S®TS-EMF	1158.9295.05
Isotropic antenna, 30 MHz to 3 GHz for R&S®TS-EMF	R&S®TSEMF-B1	1074.5719.02
Isotropic antenna, 700 MHz to 6 GHz for R&S®TS-EMF	R&S®TSEMF-B2	1074.5702.02
Isotropic antenna, 9 kHz to 200 MHz for R&S®TS-EMF	R&S®TSEMF-B3	1074.5690.02
Converter cable	R&S®TSEMF-CV	1158.9250.02
Matching pad, 50/75 Ω, L section	R&S®RAM	0358.5414.02
Matching pad, 50/75 Ω, series resistor 25 Ω	R&S®RAZ	0358.5714.02
Matching pad, 50/75 Ω, L section, type N – BNC	R&S®FSH-Z38	1300.7740.02
Adapter type N (m) – BNC (f)		0118.2812.00
Adapter type N (m) – type N (m)		0092.6581.00
Adapter type N (m) – SMA (f)		4012.5837.00
Adapter type N (m) – 7/16 (f)		3530.6646.00
Adapter type N (m) – 7/16 (m)		3530.6630.00
Adapter type N (m) – FME (f)		4048.9790.00
Adapter BNC (m) – banana (f)		0017.6742.00
Attenuator, 50 W, 20 dB, 50 Ω, DC to 6 GHz, type N (f) – type N (m)	R&S®RDL50	1035.1700.52
Attenuator, 100 W, 20 dB, 50 Ω, DC to 2 GHz, type N (f) – type N (m)	R&S®RBU100	1073.8495.20
Attenuator, 100 W, 30 dB, 50 Ω, DC to 2 GHz, type N (f) – type N (m)	R&S®RBU100	1073.8495.30
Compact probe set for E and H near-field measurements, 30 MHz to 3 GHz	R&S®HZ-15	1147.2736.02
Near-field probe set H field	R&S®HZ-17	1339.4141.02
Preamplifier (3 GHz, 20 dB), power adapter (100 V to 230 V), for R&S®HZ-15	R&S®HZ-16	1147.2720.02
Omnidirectional antenna for circular right-hand polarization, 18 GHz to 26.5 GHz	R&S®AC004R1	0749.3000.03
Omnidirectional antenna for circular left-hand polarization, 18 GHz to 26.5 GHz	R&S®AC004L1	4078.4000.02
Omnidirectional antenna for circular right-hand polarization, 26.5 GHz to 40 GHz	R&S®AC004R2	0749.3251.03
Omnidirectional antenna for circular left-hand polarization, 26.5 GHz to 40 GHz	R&S®AC004L2	4078.5006.02
Broadband omnidirectional antenna, 800 MHz to 26.5 GHz	R&S®HF907OM	4070.3279.02
Standard gain horn antenna, 26 GHz to 40 GHz, mid band gain 20 dB, WR 28	R&S®FH-SG-40	3629.2393.02
Standard gain horn antenna adapter	R&S®HA-Z370	1334.8432.02
Mast and tripod adapter	R&S®KM011Z8	4090.4006.02
Wooden tripod	R&S®HZ-1	0837.2310.02

Designation	Type	Order No.
Test port cable, 0 Hz to 26.5 GHz 3.5 mm (f) to 3.5 mm (m), length: 635 mm	R&S®ZV-Z93	1301.7595.25
Test port cable, 0 Hz to 26.5 GHz 3.5 mm (f) to 3.5 mm (m), length: 965 mm	R&S®ZV-Z93	1301.7595.38
Test port cable, 0 Hz to 26.5 GHz 3.5 mm (f) to 3.5 mm (m), length: 610 mm	R&S®ZV-Z193	1306.4520.24
Test port cable, 0 Hz to 26.5 GHz 3.5 mm (f) to 3.5 mm (m), length: 914 mm	R&S®ZV-Z193	1306.4520.36
Test port cable, 0 Hz to 26.5 GHz 3.5 mm (f) to 3.5 mm (m), length: 1524 mm	R&S®ZV-Z193	1306.4520.60
Test port cable, 0 Hz to 40 GHz 2.92 mm (f) to 2.92 mm (m), length: 635 mm	R&S®ZV-Z95	1301.7608.25
Test port cable, 0 Hz to 40 GHz 2.92 mm (f) to 2.92 mm (m), length: 965 mm	R&S®ZV-Z95	1301.7608.38
Test port cable, 0 Hz to 40 GHz 2.92 mm (f) to 2.92 mm (m), length: 610 mm	R&S®ZV-Z195	1306.4536.24
Test port cable, 0 Hz to 40 GHz 2.92 mm (f) to 2.92 mm (m), length: 914 mm	R&S®ZV-Z195	1306.4536.36

R&S®NRP-Zxx power sensors supported by the R&S®Spectrum Rider FPH ²¹

Designation	Type	Order No.
Directional power sensor, 25 MHz to 1 GHz	R&S®FSH-Z14	1120.6001.02
Directional power sensor, 200 MHz to 4 GHz	R&S®FSH-Z44	1165.2305.02
Universal power sensor, 10 MHz to 8 GHz, 100 mW, two-path	R&S®NRP-Z211	1417.0409.02
Universal power sensor, 10 MHz to 18 GHz, 100 mW, two-path	R&S®NRP-Z221	1417.0309.02
Wideband power sensor, 50 MHz to 18 GHz, 100 mW	R&S®NRP-Z81	1137.9009.02
Wideband power sensor, 50 MHz to 40 GHz, 100 mW (2.92 mm)	R&S®NRP-Z85	1411.7501.02
Wideband power sensor, 50 MHz to 40 GHz, 100 mW (2.40 mm)	R&S®NRP-Z86	1417.0109.40
Wideband power sensor, 50 MHz to 44 GHz, 100 mW (2.40 mm)	R&S®NRP-Z86	1417.0109.44
Three-path diode power sensor, 100 pW to 200 mW, 10 MHz to 8 GHz	R&S®NRP8S	1419.0006.02
Three-path diode power sensor, 100 pW to 200 mW, 10 MHz to 18 GHz	R&S®NRP18S	1419.0029.02
Three-path diode power sensor, 100 pW to 200 mW, 10 MHz to 33 GHz	R&S®NRP33S	1419.0064.02
Three-path diode power sensor, 100 pW to 200 mW, 10 MHz to 40 GHz	R&S®NRP40S	1419.0041.02
Three-path diode power sensor, 100 pW to 200 mW, 10 MHz to 50 GHz	R&S®NRP50S	1419.0087.02
Thermal power sensor, 300 nW to 100 mW, DC to 18 GHz	R&S®NRP18T	1424.6115.02
Thermal power sensor, 300 nW to 100 mW, DC to 33 GHz	R&S®NRP33T	1424.6138.02
Thermal power sensor, 300 nW to 100 mW, DC to 40 GHz	R&S®NRP40T	1424.6150.02
Thermal power sensor, 300 nW to 100 mW, DC to 50 GHz	R&S®NRP50T	1424.6173.02
Thermal power sensor, 300 nW to 100 mW, DC to 67 GHz	R&S®NRP67T	1424.6196.02
Thermal power sensor, 300 nW to 100 mW, DC to 110 GHz	R&S®NRP110T	1424.6215.02
Average power sensor, 100 pW to 200 mW, 8 kHz to 6 GHz	R&S®NRP6A	1424.6796.02
Average power sensor, 100 pW to 200 mW, 8 kHz to 18 GHz	R&S®NRP18A	1424.6815.02
R&S®NRP-Zxx power sensors require the following adapter cable for operation on the R&S®Spectrum Rider FPH		
USB adapter cable for R&S®FSH-Z14/ R&S®FSH-Z44 power sensors	R&S®FSH-Z144	1145.5909.02
USB adapter cable (passive), length: 2 m, to connect R&S®NRP-Zxx S/SN power sensors to the R&S®Spectrum Rider FPH	R&S®NRP-Z4	1146.8001.02
R&S®NRP power sensors require the following adapter cable for operation on the R&S®Spectrum Rider FPH		
USB interface cable, length: 1.5 m, to connect R&S®NRP sensors to the R&S®Spectrum Rider FPH	R&S®NRP-ZKU	1419.0658.03

Optical power sensors and accessories

Designation	Type	Order No.
OEM USB optical power meter (Germanium)	R&S®HA-Z360	1334.5162.00
OEM USB optical power meter (filtered InGaAs)	R&S®HA-Z361	1334.5179.00
SC adapter for optical power meter	R&S®HA-Z362	1334.5185.00
LC adapter for optical power meter	R&S®HA-Z363	1334.5191.00
2.5 mm universal adapter for optical power meter	R&S®HA-Z364	1334.5204.00
1.25 mm universal adapter for optical power meter	R&S®HA-Z365	1334.5210.00
Patch cord SC-LC SM, SX, length: 1 m	R&S®HA-Z366	1334.5227.00
Patch cord SC-SC SM, SX, length: 1 m	R&S®HA-Z367	1334.5233.00

²¹ For average power measurements only.

Service options

Warranty		
Base unit		3 years
All other items ²²		1 year
Options		
Extended warranty, one year	R&S®WE1	Please contact your local Rohde & Schwarz sales office.
Extended warranty, two years	R&S®WE2	
Extended warranty with calibration coverage, one year	R&S®CW1	
Extended warranty with calibration coverage, two years	R&S®CW2	
Extended warranty with accredited calibration coverage, one year	R&S®AW1	
Extended warranty with accredited calibration coverage, two years	R&S®AW2	

Extended warranty with a term of one and two years (WE1 and WE2)

Repairs carried out during the contract term are free of charge ²³. Necessary calibration and adjustments carried out during repairs are also covered.

Extended warranty with calibration coverage (CW1 and CW2)

Enhance your extended warranty by adding calibration coverage at a package price. This package ensures that your Rohde & Schwarz product is regularly calibrated, inspected and maintained during the term of the contract. It includes all repairs ²³ and calibration at the recommended intervals as well as any calibration carried out during repairs or option upgrades.

Extended warranty with accredited calibration (AW1 and AW2)

Enhance your extended warranty by adding accredited calibration coverage at a package price. This package ensures that your Rohde & Schwarz product is regularly calibrated under accreditation, inspected and maintained during the term of the contract. It includes all repairs ²³ and accredited calibration at the recommended intervals as well as any accredited calibration carried out during repairs or option upgrades.

CDMA2000® is a registered trademark of the Telecommunications Industry Association (TIA-USA).

²² For options that are installed, the remaining base unit warranty applies if longer than 1 year. Exception: all batteries have a 1 year warranty.

²³ Excluding defects caused by incorrect operation or handling and force majeure. Wear-and-tear parts are not included.

Service that adds value

- ▶ Worldwide
- ▶ Local and personalized
- ▶ Customized and flexible
- ▶ Uncompromising quality
- ▶ Long-term dependability

Rohde & Schwarz

The Rohde & Schwarz electronics group offers innovative solutions in the following business fields: test and measurement, broadcast and media, secure communications, cybersecurity, monitoring and network testing. Founded more than 80 years ago, the independent company which is headquartered in Munich, Germany, has an extensive sales and service network with locations in more than 70 countries.

www.rohde-schwarz.com

Sustainable product design

- ▶ Environmental compatibility and eco-footprint
- ▶ Energy efficiency and low emissions
- ▶ Longevity and optimized total cost of ownership

Certified Quality Management
ISO 9001

Certified Environmental Management
ISO 14001

Rohde & Schwarz training

www.training.rohde-schwarz.com

Rohde & Schwarz customer support

www.rohde-schwarz.com/support

